



Xtreme XM-1, XM-12, & XM-12U

The XM-1, XM-12, and XM-12 Ultra are part of the Xtreme XM series of batch counting friction feeders. The Xtreme XM series offers three feeder models for one-shot and batch counting applications for products up to 12" wide.

If you're pursuing greater productivity through automation, the Xtreme line provides dependable high-speed batch-counting and consistent performance for products such as paper sheets/forms, greeting and novelty cards, plastic cards, envelopes, brochures, magazines, folded and open edge documents, tri-fold and z-fold documents, and much more. These Xtreme XM batch count feeders come standard with:

- ▶ **Electro-Mechanical Double Sheet Detect* ▶ *Vacuum Assist Feeding*
- ▶ *Forward/Reverse Rotating Gate* ▶ *No Adjust Discharge*
- ▶ **Touchscreen PLC Control Panel*

Simple, easy-to-use controls and minimal tool-free setup adjustments allow for greater uptime, maximizing productivity. Ideal in automatic product feeding for inline applications including shrink-wrapping and poly-bagging, or individual offline batch-counting. Easily mounts to adjustable mounting stand* for use throughout your production and fulfillment area.

Superior-PHS offers the most robust friction feeders on the market. These simple to operate feeders come standard with vacuum belt/manifold, forward/reverse rotating gates, and the lowest cost of maintenance. All new Xtreme series feeders come with a 1 year parts replacement warranty. The robust design and dependability of the Xtreme line make it the best value on the market.

**Not standard on XM-1*



XM-12

SPECIFICATIONS:

Utilities Requirements

115/230vac – 6/3A – 50/60Hz

Dimensions:

XM-1—21"W x 23"L x 24"H

XM-12—23"W x 25"L x 24"H

Weight:

XM-1—85 lbs.

XM-12—90 lbs.

Product Sizes:

Min. 2"W x 3" L – Max 12"W x 12"L
(additional lengths available)

Product Stack Height:

up to 20" in hopper

Product Thickness: .003" to .750"


Field upgradeable for high-speed and wide format options.



XM-1 Versatile



XM-12Ultra

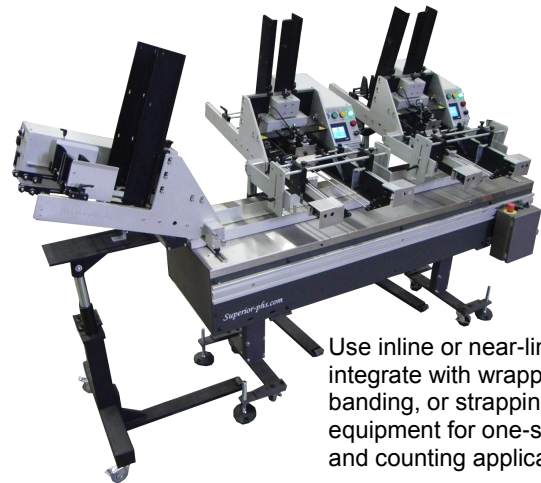

Use inline or near-line to integrate with wrapping, banding, or strapping equipment for one-shot and counting applications

Superior-PHS

14414 21st Avenue North
Plymouth, MN 55447

Phone: 763-546-9140

Fax: 763-546-8883

E-mail: info@superior-phs.com

Web: www.superior-phs.com

	XM-1	XM-12	XM-12u
Max. Count	99 pcs.	99,999 pcs.	99,999 pcs.
Max. Speed	400 ft./min	370 ft./min	750 ft./min
Motor	DC	Servo	Servo
Controls	Push button	Push Button and Touchscreen PLC	Push Button and Touchscreen PLC
Electro-Mechanical Double Detect	Optional	Yes	Yes