


FPS 400H

HIGH PROFILE



Packaging Systems Inc.

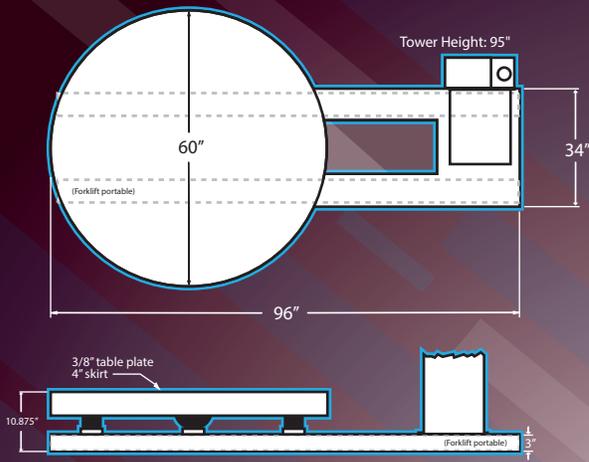

CUT PROOF
COATED PRESTRETCH
ROLLERS



POWER DE-ENERGIZED
WHEN CARRIAGE DOOR OPEN



7" FULL COLOR TOUCH SCREEN



FORKLIFT PORTABLE FRONT AND REAR

SPECIFICATIONS:

CONTROLS

PRODUCTION SPEED

LOAD SIZE

WEIGHT CAPACITY

STRUCTURAL

TURNTABLE DRIVE

TURNTABLE SPEED

CARRIAGE DRIVE

FILM DELIVERY

FILM ROLL

POWER REQ.

- FULL COLOR 7" PLC TOUCH SCREEN
- 1-40 LPH*
- 55"L x 55"W x 90"H (80" Diagonal)
- 5000LBS
- WELDED STEEL CONSTRUCTION
- 3/4HP AC MOTOR & DELTA 1HP VFD DRIVE
- #50 ANSI CHAIN, 20:1 GEARBOX
- 4 HEAVY DUTY CASTERS
- 0-15RPM
- 3/4HP AC MOTOR & DELTA 1HP VFD DRIVE
- #50 ANSI CHAIN, 60:1 GEARBOX
- HURRICANE THREAD® PRESTRETCH CARRIAGE
- 200% FACTORY SET PRESTRETCH
- 50-250% STRETCH AVAILABLE ON REQUEST
- 20" MACHINE FILM, 3" CORE
- 115VAC, 15A, 60Hz- PLUG AND PLAY

SAFETY

ONBOARD PROGRAMS

OPTIONS

- FULLY GUARDED TOWER & MOVING PARTS
- NO PINCH: CARRIAGE DE-ENERGIZED WHEN DOOR OPEN
- EMERGENCY STOP BUTTON
- STANDARD WRAP CYCLE
- STANDARD W/TOP COVER PAUSE
- BOTTOM WRAPS FIRST
- WRAP UPWARDS ONLY
- HEIGHT/BASE EXTENSION
- INTEGRATED SCALE PACKAGE
- DUAL TURNTABLE (400HDT)
- SAFETY FENCING
- SAFETY LIGHT CURTAINS
- SPLIT BASE (FOR OVERSIZED LOADS)

*SUGGESTED LOADS PER HOUR- May vary depending on load sizes, loading/unloading speeds and number of wraps or wrapping pauses on load.