


FPS 400L

FULLY SKIRTED LOW PROFILE



Packaging Systems Inc.

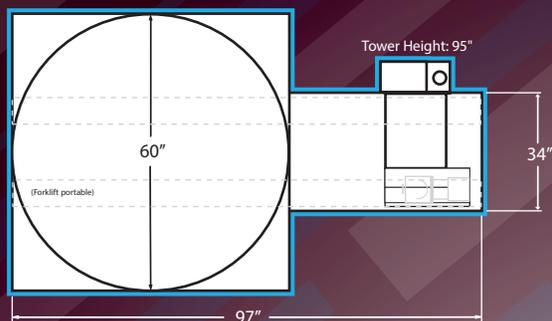

CUT PROOF
COATED PRESTRETCH
ROLLERS

FORKLIFT PORTABLE FRONT AND REAR



POWER DE-ENERGIZED
WHEN CARRIAGE DOOR OPEN



SPECIFICATIONS:

CONTROLS
PRODUCTION SPEED
LOAD SIZE
WEIGHT CAPACITY
STRUCTURAL
TURNTABLE DRIVE

TURNTABLE SPEED
CARRIAGE DRIVE

FILM DELIVERY

FILM ROLL
POWER REQ.

- FULL COLOR 7" PLC TOUCH SCREEN
- 1-40 LPH*
- 55"L x 55"W x 90"H (80" Diagonal)
- 5000LBS OR **UPGRADE TO 6500LBS**
- FULL SKIRT WELDED STEEL CONSTRUCTION
- 3/4HP AC MOTOR & DELTA 1HP VFD DRIVE
- #50 ANSI CHAIN, 20:1 GEARBOX
- 40 TABLE SUPPORT WHEELS
- 0-15RPM
- 3/4HP AC MOTOR & DELTA 1HP VFD DRIVE
- #50 ANSI CHAIN, 60:1 GEARBOX
- HURRICANE THREAD® PRESTRETCH CARRIAGE
- 200% FACTORY SET PRESTRETCH
- 50-250% STRETCH AVAILABLE ON REQUEST
- 20" MACHINE FILM, 3" CORE
- 115VAC, 15A, 60Hz- PLUG AND PLAY

SAFETY

- FULLY GUARDED TOWER & MOVING PARTS
- NO PINCH: CARRIAGE DE-ENERGIZED WHEN DOOR OPEN
- EMERGENCY STOP BUTTON

ONBOARD PROGRAMS

- STANDARD WRAP CYCLE
- STANDARD W/TOP COVER PAUSE
- BOTTOM WRAPS FIRST
- WRAP UPWARDS ONLY

OPTIONS

- HEIGHT/BASE EXTENSION
- LOADING RAMP
- HEAVY DUTY EXTENDED RAMP (For powered hand trucks)
- INTEGRATED SCALE PACKAGE
- DUAL TURNTABLE (400LDT)
- SAFETY FENCING/LIGHT CURTAINS

*SUGGESTED LOADS PER HOUR- May vary depending on load sizes, loading/unloading speeds and number of wraps or wrapping pauses on load.