


# FPS 600

CUSTOMIZABLE INLINE TURNTABLE AUTOMATIC



Packaging Systems Inc.

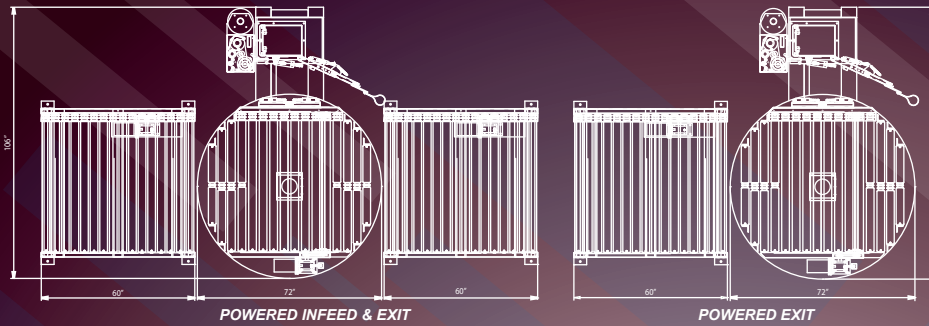

\* FPS 600 shown with gravity feed exit conveyor and staging photo eyes (not included)

## SPECIFICATIONS:

### CONTROLS

- FULL COLOR 7" PLC TOUCH SCREEN

### PRODUCTION SPEED

- 1-40 LPH\*

### LOAD SIZE

- BASED ON CUSTOMER REQUIREMENT

### WEIGHT CAPACITY

- **8000LBS**

### STRUCTURAL

- FULL SKIRT WELDED STEEL CONSTRUCTION

### TURNTABLE DRIVE

- 1HP AC MOTOR & DELTA 1HP VFD DRIVE
- DIRECT GEAR DRIVE RING AND PINION
- 4 HEAVY DUTY CASTERS

### TURNTABLE SPEED

- 0-15RPM

### CARRIAGE DRIVE

- 3/4HP AC MOTOR & DELTA 1HP VFD DRIVE
- #50 ANSI CHAIN, 60:1 GEARBOX

### FILM DELIVERY

- HURRICANE THREAD® PRESTRETCH CARRIAGE
- 200% FACTORY SET PRESTRETCH
- 50-250% STRETCH AVAILABLE ON REQUEST

### FILM ROLL

- 20" MACHINE FILM, 3" CORE

### POWER REQ.

- BASED ON CUSTOMER REQUIREMENTS

### AIR REQ. SAFETY

- 80 P.S.I. @ 3 CFM
- FULLY GUARDED TOWER & MOVING PARTS
- NO PINCH: CARRIAGE DE-ENERGIZED WHEN DOOR OPEN
- EMERGENCY STOP BUTTON

### ONBOARD PROGRAMS

- STANDARD WRAP CYCLE
- STANDARD W/TOP COVER PAUSE
- BOTTOM WRAPS FIRST
- WRAP UPWARDS ONLY

### OPTIONS

- HEIGHT/BASE EXTENSION
- INTEGRATED SCALE PACKAGE
- GRAVITY OR POWERED INFEED-EXIT CONVEYORS
- SAFETY FENCING
- SAFETY LIGHT CURTAINS

\*SUGGESTED LOADS PER HOUR- May vary depending on load sizes, loading/unloading speeds and number of wraps or wrapping pauses on load.