



FPS 500H

HEAVY DUTY HIGH PROFILE- **8000LBS CAPACITY**

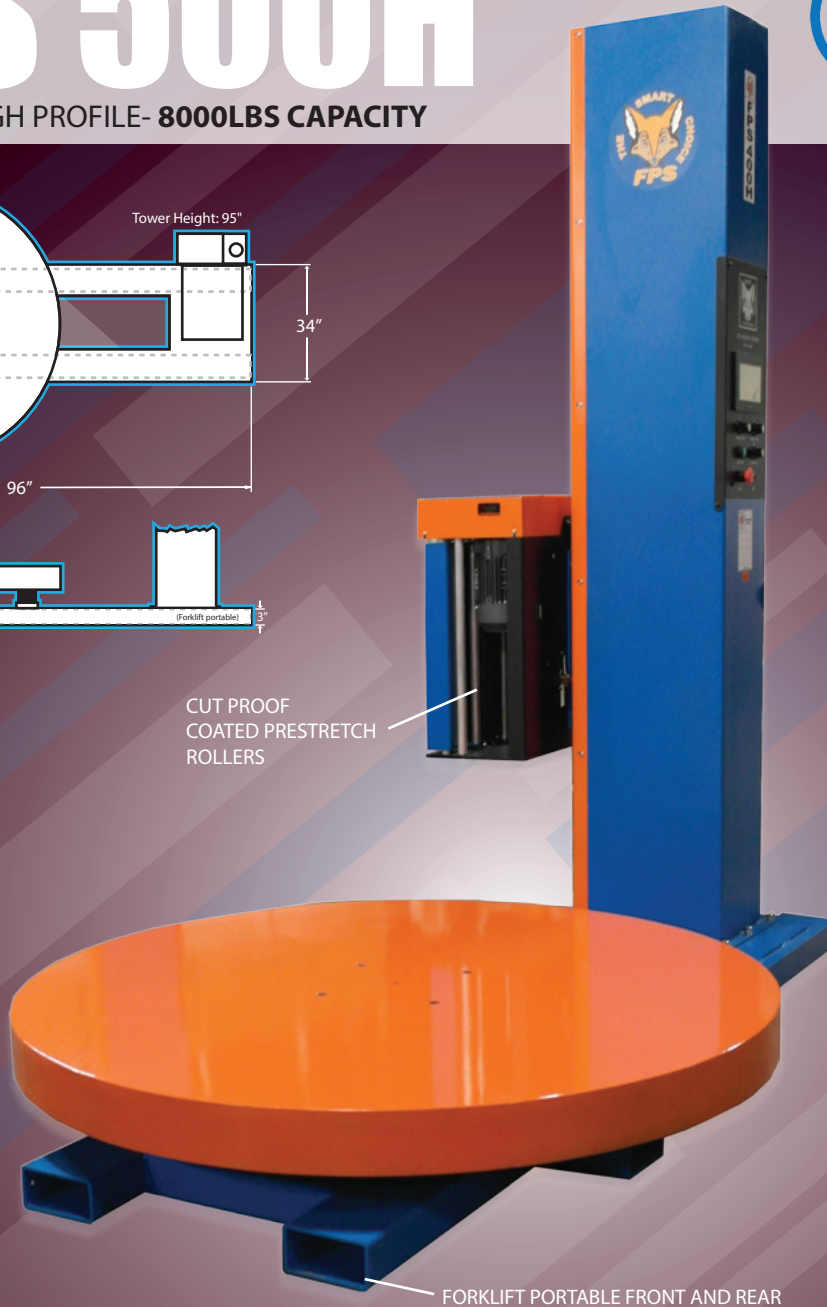

Packaging Systems Inc.

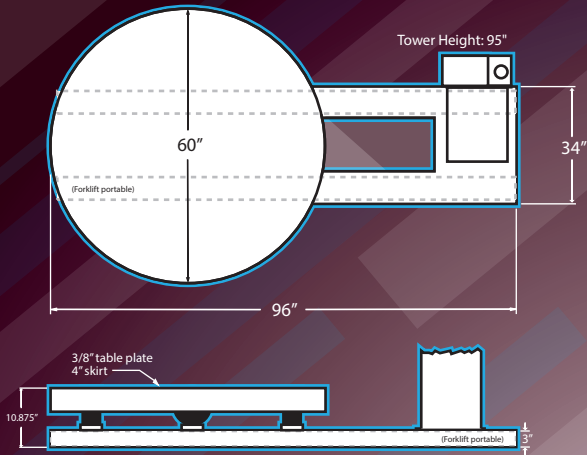

POWER DE-ENERGIZED WHEN CARRIAGE DOOR OPEN



7" FULL COLOR TOUCH SCREEN

SPECIFICATIONS:

CONTROLS
PRODUCTION SPEED
LOAD SIZE
WEIGHT CAPACITY
STRUCTURAL
TURNTABLE DRIVE

TURNTABLE SPEED
CARRIAGE DRIVE

FILM DELIVERY

FILM ROLL
POWER REQ.

- FULL COLOR 7" PLC TOUCH SCREEN
- 1-55 LPH*
- 55"L x 55"W x 82"H (80" Diagonal)
- **8000LBS**
- WELDED STEEL CONSTRUCTION
- 3/4HP AC MOTOR & DELTA 1HP VFD DRIVE
- #50 ANSI CHAIN, 20:1 GEARBOX
- DIRECT DRIVE RING & PINION BEARING
- 4 HEAVY DUTY SWIVEL CASTERS
- 0-15RPM
- 3/4HP AC MOTOR & DELTA 1HP VFD DRIVE
- #50 ANSI CHAIN, 60:1 GEARBOX
- HURRICANE THREAD® PRESTRETCH CARRIAGE
- 200% FACTORY SET PRESTRETCH
- 50-250% STRETCH AVAILABLE ON REQUEST
- 20" MACHINE FILM, 3" CORE
- 115VAC, 15A, 60Hz- PLUG AND PLAY

SAFETY

ONBOARD PROGRAMS

OPTIONS

- FULLY GUARDED TOWER & MOVING PARTS
- NO PINCH: CARRIAGE DE-ENERGIZED WHEN DOOR OPEN
- EMERGENCY STOP BUTTON
- STANDARD WRAP CYCLE
- STANDARD W/TOP COVER PAUSE
- BOTTOM WRAPS FIRST
- WRAP UPWARDS ONLY
- HEIGHT/BASE EXTENSION
- INTEGRATED SCALE PACKAGE
- DUAL TURNTABLE (500HDT)
- SAFETY FENCING
- SAFETY LIGHT CURTAINS
- SPLIT BASE (FOR OVERSIZED LOADS)

*SUGGESTED LOADS PER HOUR- May vary depending on load sizes, loading/unloading speeds and number of wraps or wrapping pauses on load.