


FPS 800

SEMI-AUTOMATIC ROTARY ARM



CUT PROOF
COATED
PRESTRETCH
ROLLERS

FPS
HURRICANE
THREAD

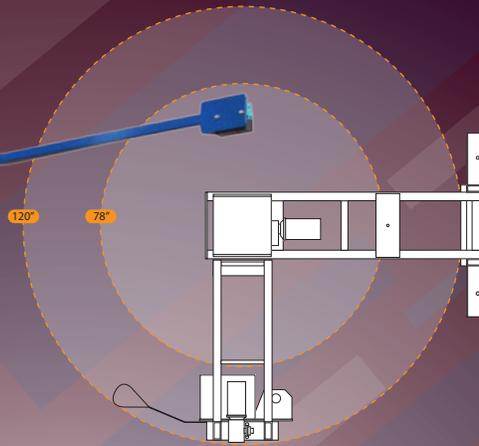

STANDARD HEIGHT: 108"



FPS 800 FREESTAND



FPS 800 4 LEG GANTRY (3 LEG ALSO AVAILABLE)

FPS 800 WALL MOUNT

SPECIFICATIONS:

CONTROLS
PRODUCTION SPEED
LOAD SIZE
WEIGHT CAPACITY
STRUCTURAL
ARM DRIVE

- FULL COLOR 7" PLC TOUCH SCREEN
- 1-40 LPH*
- 55"L x 55"W x 82"H (80" Diagonal)
- UNLIMITED
- WELDED STEEL TUBE CONSTRUCTION
- 3/4HP AC MOTOR & DELTA 1HP VFD DRIVE
- 20:1 GEARBOX
- DIRECT GEAR DRIVE RING & PINION

ARM SPEED
CARRIAGE DRIVE

- 0-15RPM
- 3/4HP AC MOTOR & DELTA 1HP VFD DRIVE
- #50 ANSI CHAIN, 60:1 GEARBOX

FILM DELIVERY

- HURRICANE THREAD® PRESTRETCH CARRIAGE
- 200% FACTORY SET PRESTRETCH
- 50-250% STRETCH AVAILABLE ON REQUEST

FILM ROLL

- 20" MACHINE FILM, 3" CORE

POWER REQ.

- 115VAC, 15A, 60Hz- PLUG AND PLAY

SAFETY

- NO PINCH: CARRIAGE DE-ENERGIZED WHEN DOOR OPEN
- EMERGENCY STOP BUTTON

ONBOARD PROGRAMS

- STANDARD WRAP CYCLE
- STANDARD W/TOP COVER PAUSE
- BOTTOM WRAPS FIRST
- WRAP UPWARDS ONLY

OPTIONS

- HEIGHT/ARM EXTENSION
- WALL MOUNT, FREE STAND, 3 OR 4 LEG GANTRY
- SAFETY LIGHT CURTAINS
- SAFETY FENCING

*SUGGESTED LOADS PER HOUR- May vary depending on load sizes, loading/unloading speeds and number of wraps or wrapping pauses on load.