

ALL-IN-ONE, HIGH QUALITY SHRINKWRAP SYSTEMS IN A COMPACT FOOTPRINT

Damark MP Series Combo Systems are highly efficient shrinkwrap solutions that produce attractive packages for a wide range of small, large, stable and unstable products.

Plexpack's Damark MP series maximizes floor space, efficiency and value by combining an L-Bar sealer and ideally matched shrink tunnel on a single frame.

All Damark Combo Systems provide quick changeover and easy film load, intuitive controls and precise seal and wrapping adjustments for strong, accurate shrink wrapping. Combo Systems include the same precise controls and adjustments for speed, temperature, and wrapping as our industry leading stand alone L-Bar sealers.


Frames are heavy duty steel or stainless steel for durable, long lasting performance in any production environment.

The MP Series is available in two models –the MP-2 and MP-3.

The MP-3 adds a variable speed discharge conveyor to the standard MP-2 model.

Key Benefits and Features

Both the MP-2 and MP-3 models include a 14 x 18" (35.56 x 45.72 cm) seal area and a 16" (40.64 cm) wide by 9" (22.86 cm) tall tunnel opening. Damark Combo Systems are thoughtfully designed and intuitive to use.

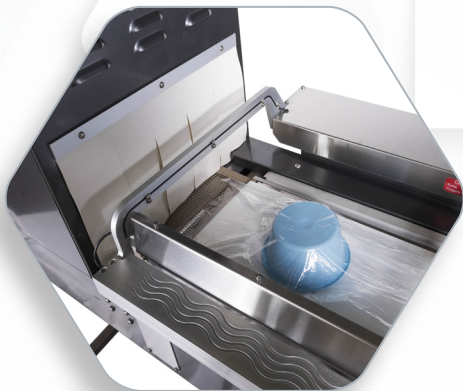

Key features and benefits include:

- Counterbalanced sealing head with automatic air cushion return
- Electromagnetic seal bar hold down
- Electronic control system for sealer and shrink tunnel
- Adjustable stainless steel loading platform
- Variable speed Teflon mesh belt conveyor
- Quick change film system—easily adjustable for different sized rolls.
- Film clamps
- Perforator roller for air evacuation from



completed package

- Locking casters
- Top, side and bottom heat vents

Numerous custom options are available including infeed orientation, hot knife, Teflon blinds for LDPE, and Power Film Unwind.

Durable Damark systems provide years of 24/7 service and meet or exceed industry standards for quality and safety. Plexpack provides strong aftermarket support to ensure high value and performance for the life of your machinery investment. The choice for Shrinkwrap Combo Systems has never been more certain.

DAMARK
Shrinkwrap & Bundling Systems



a **PLEXPACK** solution

TECHNICAL SPECIFICATIONS

Features	MP 2	MP 3
Sealing Area Width	14" (35.56 cm)	14" (35.56 cm)
Sealing Area Length	18" (45.72 cm)	18" (45.72 cm)
Sealing Area Height at Center	4" (10.16 cm)	4" (10.16 cm)
Maximum Film Width	18" (45.72 cm)	18" (45.72 cm)
Shrink Tunnel Width	24" (60.96 cm)	24" (60.96 cm)
Shrink Tunnel Length	16" (40.64 cm)	16" (40.64 cm)
Shrink Tunnel Height	9" (22.86 cm)	9" (22.86 cm)
Power Requirement	220 volts, 18 amps	220 volts, 18 amps
Construction	Aluminium & Stainless Steel or Painted Steel	Aluminium & Stainless Steel or Painted Steel
Speed	Operator/Application Dependent (approximately 14 per minute)	Operator/Application Dependent (approximately 14 per minute)
Air Requirement	Not Required	Not Required
Infeed Orientation	Right to Left	Right to Left
Perforator Roller	One	One
Stand	Heavy Duty Steel or Stainless Steel	Heavy Duty Steel or Stainless Steel
Discharge Conveyor Type	None	Variable Speed
Discharge Conveyor Length	None	36" (91.44 cm)
Options	MP 2	MP 3
Power Film Unwind	■	■
Hot Knife	■ (220 volts, 24 amps)	■ (220 volts, 24 amps)
Teflon Blinds for LDPE	■	■
Infeed Orientation	Left to Right	Left to Right

Plexpack: Flexible Solutions. Certain Results.

Plexpack delivers flexible packaging machinery solutions and certain results for customers worldwide. For more than 40 years Plexpack has been known for quickly delivering innovative solutions that are simple to use and provide superior performance and return on investment. More than 5,000 customers worldwide depend on Plexpack for packaging efficiency, product integrity, safe transport and attractive presentation.

Service and Support

Every Plexpack solution is backed by multi-lingual support and service from our offices in Canada and the US and our international network of distribution partners. We provide sales, service and support in English, French, Spanish and Portuguese. You can be certain that from first contact through the entire product lifecycle, Plexpack will provide personal attention to your flexible packaging needs.

Be Certain... Contact:

Phone: 416.291.8085

Toll Free: 800.265.1775

Fax: 416.298.4328

Email: info@plexpack.com

Web: www.plexpack.com

Plexpack Head Office

1160 Birchmount Road, Unit 2
Toronto, ON M1P 2B8 Canada

Plexpack US Office

24418 S. Main Street, Suite 403
Carson, CA 90745 United States

Plexpack, VacPack, Emplex and Damark are registered trademarks of Plexpack Corporation. ©2017 Plexpack Corporation.

a **PLEXPACK**™ solution